



ASSEMBLY INSTRUCTIONS

3862200

CHEVROLET 15-16000 SERIES

1 3869824 ROD

2 3869825 SHAFT ASM

3 Part numbers & installation--same as R. P. O. M35

PG

3859349 (M35-6)

PG (2/29/94)

4 1365182

TRANS LEVER


1 5 9418931

NUT


4 Transmission gearshift & control adjustment

SAME AS R.P.O. M35 EXCEPT FOR OBTAINING "DRIVE" POSITION. **NOTE** OBTAIN "DRIVE" POSITION BY MOVING TRANSMISSION LEVER COUNTER CLOCKWISE TO LOW DETENT, THEN CLOCKWISE TWO DETENT POSITIONS TO "DRIVE".

NOTE Installed same as R. P. O. M35

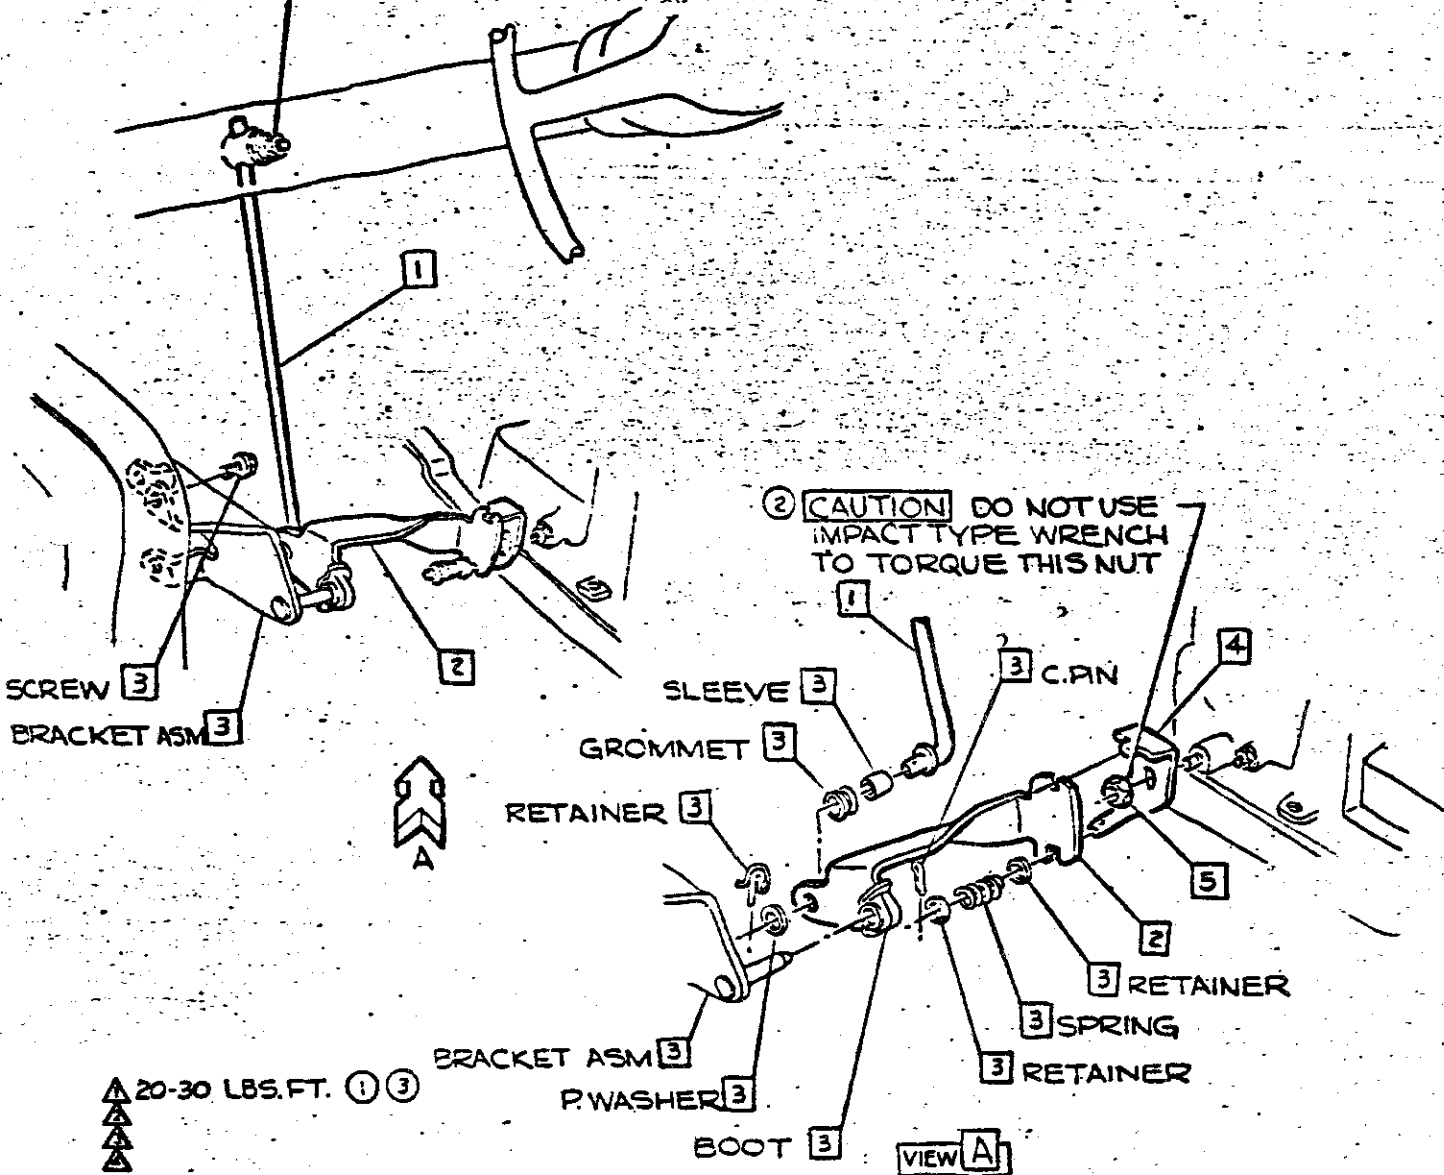

CHEVROLET MOTOR DIVISION, GMC		UPC	DATE	SYM	REVISION RECORD	AUTH	DR	CK
3-SPD. AUTO. TRANS. -CONTROL LINKAGE			M40		1	TORQUE (1) WAS 20-30 LBS. FT.	66399	CM
					2	NUT NOTE ADDED		GF
					3	TORQUE (1) WAS 20-30 LBS. FT.	66399	CM
					4	TRANS. ADJUSTMENT REVISED	70033	RM/CF
15-16000 V-8 ENGINE (EXC. 16000)			8.					
DWG	REV	REF: ECR 64598L-75652 L	X SHEET 1					
DATE REL. 8-6	DF	L- L- L-						

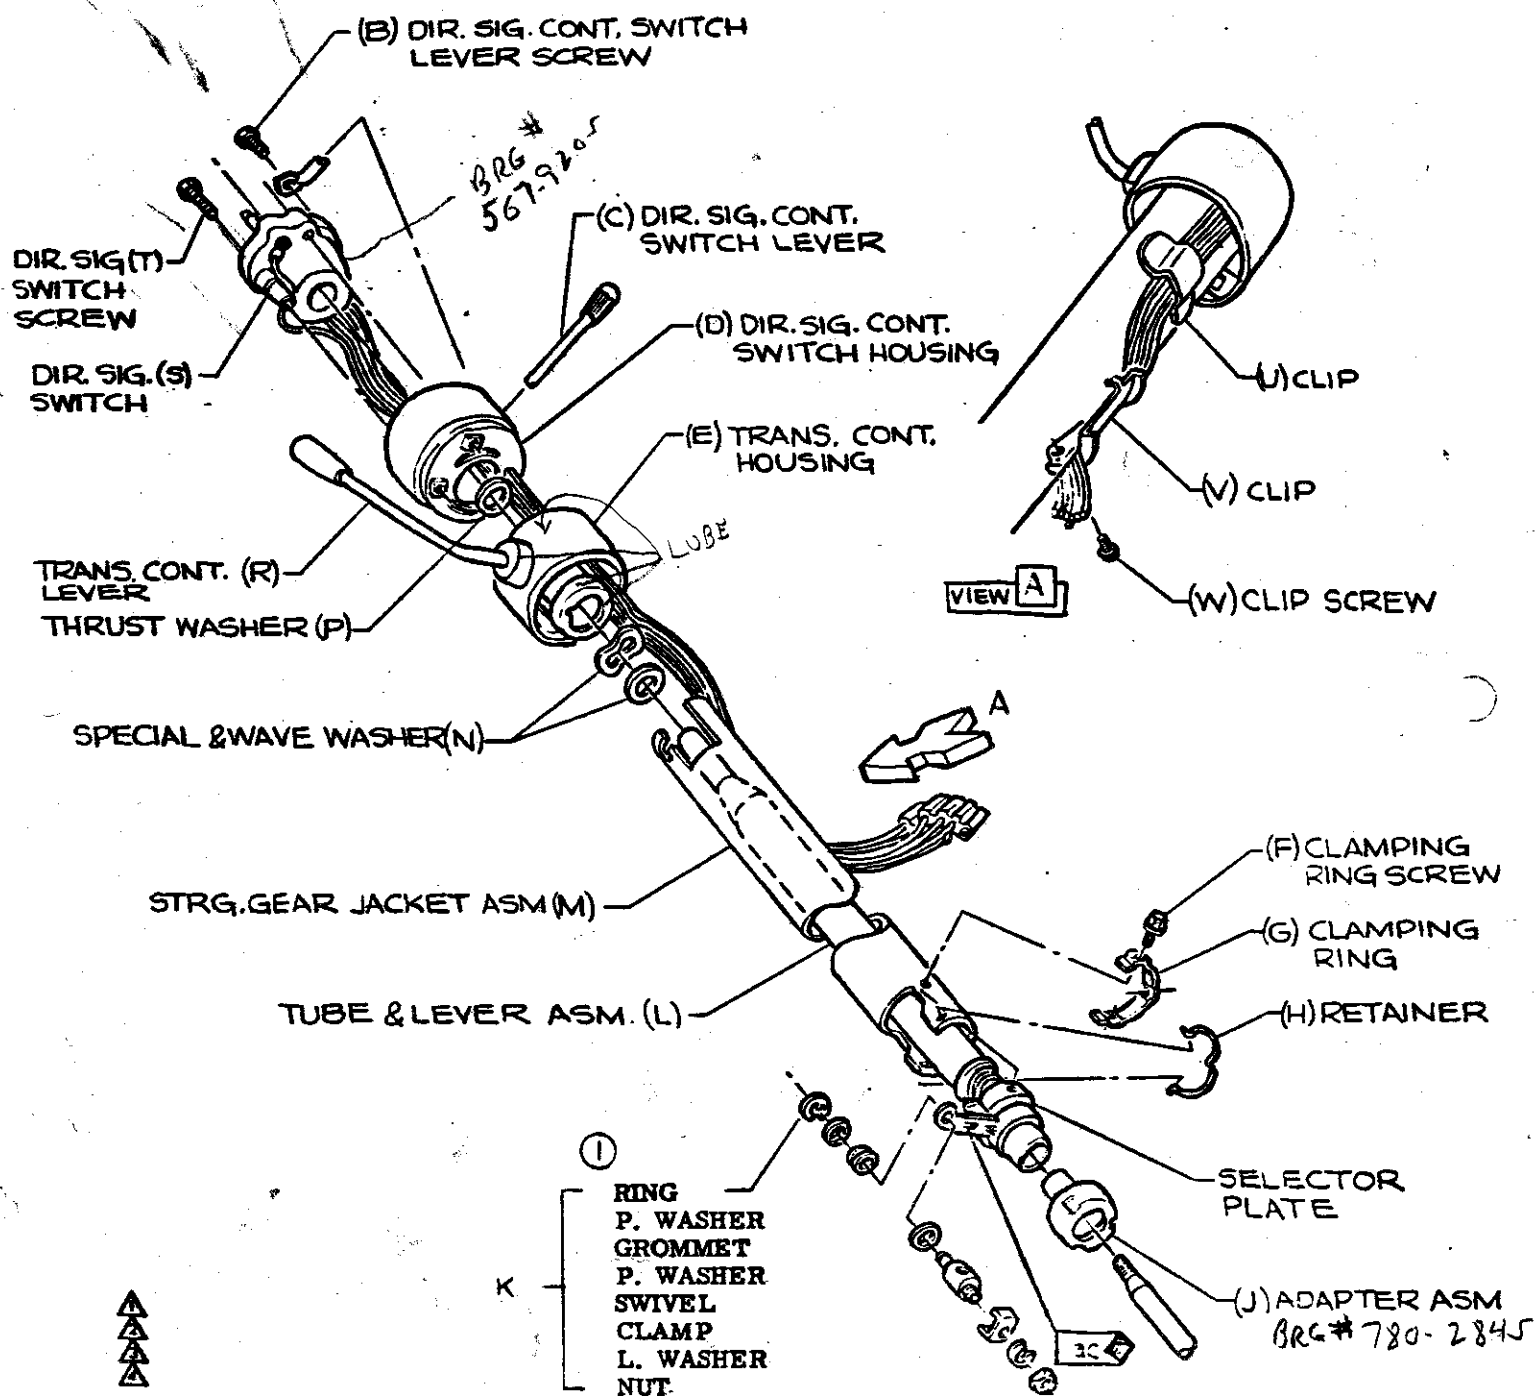

• CHEVROLET MOTOR DIVISION, GMC •				UPC	DATE	SYM	REVISION RECORD	AUTH.	DR	CK
AUTO. TRANS. -STRG. GEAR JACKET ASM. & LUBRICATION INSTRUCTION				M35 REF. 17. 16. 7 SHEET	5-25-66	1	ATTACH - 5 PARTS C RE. 100	64693	PM	DF
15-16000 EXC. 16530-600										
DWG PREL 2-20 RFM										
REF: Prel. 15 L-73312 L-										
DATE REL 5-1 L- L- L-										